## fitting instructions for roller blinds




## Step 1

#### **Outside Recess**

If the blind is to be fitted outside the window, ensure that measurement **C** is the same. **C** is simply equal to **A** minus **B**, divided by two. Follow instructions for FACE FIXING.

#### **Inside Recess**


If TOP FIXING, fix to the lintel if the window frame is uPVC, or if there are no obstructions. If FACE FIXING, fit bracket to the window frame.




## Step 2

Hold each bracket into place and mark the hole positions. Fit each bracket using 2 screws provided.

#### TOP FIXING




### **FACE FIXING**





## Step 3

Holding the fully-wound blind, insert the idle pin end into the bracket as shown.



With the idle pin end in place, insert the control end into the opposite bracket. Ensure that the blind has clicked into place using the centre lug.



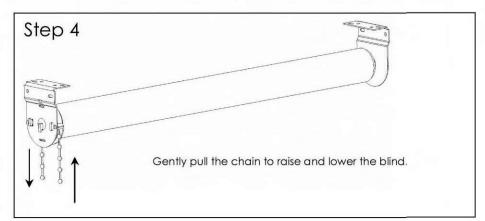

# **WARNING**

Young children can strangle in the loop of pull cords, chains, tapes that operate window coverings. They can also wrap the cords around their necks. To avoid the risk of strangulation and entanglement, keep cords out of the reach of young children. Move beds, cots and furniture away from window covering cords.

